


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF AIR CONTROL TECHNOLOGY. NO DISCLOSURE, REPRODUCTION OR USE OF ANY PART THEREOF, MAY BE MADE WITHOUT WRITTEN PERMISSION OF THE COMPANY.

DOWNDRAFT TABLE DC SERIES

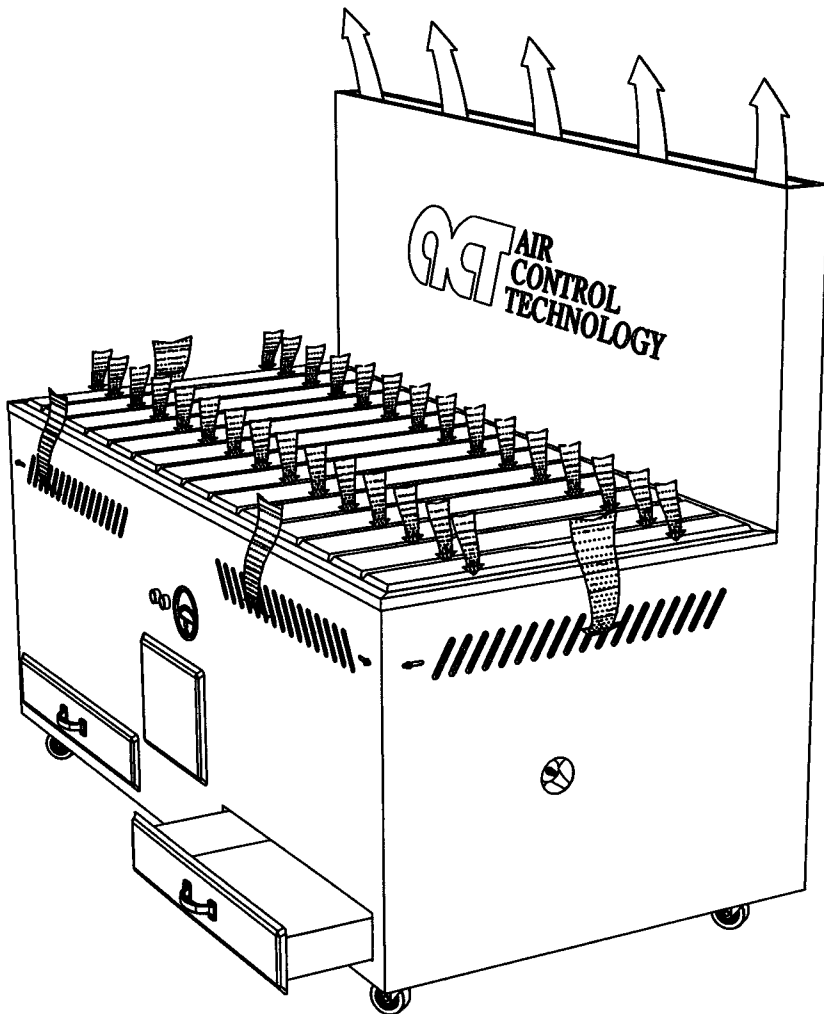

STANDARD CONFIGURATION


- Clean air discharge up
- Reverse pulse jet cleaning system
- Wood slotted / steel perforated table top for contaminated air intake
- Magnehelic gauge
- Thermo-bounded polyester cartridge filters
- Dust tight Start/Stop push buttons
- Dust tight starter enclosure
- Dust trays
- Caster wheels
- Forklift lugs

OPTIONS

- Clean air side/back discharge with adjustable flow direction damper
- Adjustable front/side grills for contaminated air intake
- Custom applications & sizes
- Stainless steel table top
- Hinged table top
- Hinged side work shields
- H.E.P.A. filters
- Teflon filters
- Tool shelf

SPECIFICATION CHART

Flow rate	4,000 C. F. M.
Filter media surface area	350 sq. ft.
Filtration efficiency	99.7% (>1 micron)
Electric motor	5 HP / 575;460/3/60

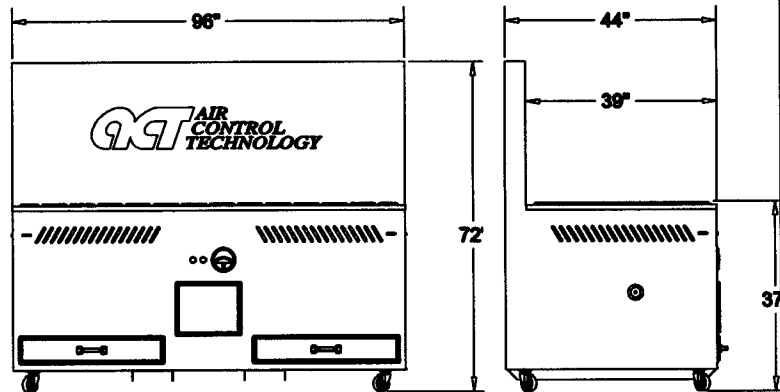

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS CATALOG ARE SUBJECT TO CHANGE WITHOUT NOTICE.



3636 Hawkestone Road, Toll Free: (800) 555-1302
 Mississauga, Ontario L5C 2V2 Fax: (905) 949-0886
 E-Mail: sales@aircontroltech.com
 www.aircontroltech.com

REL. AUG. 2002 CAT_2002/00/DC-117hw