


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF AIR CONTROL TECHNOLOGY NO DISCLOSURE REPRODUCTION OR USE OF ANY PART THEREOF, MAY BE MADE WITHOUT WRITTEN PERMISSION OF THE COMPANY.


# DOWNDRAFT TABLE DCS SERIES

## STANDARD CONFIGURATION

- Clean air side/back discharge with adjustable flow direction damper
- Reverse pulse jet cleaning system
- Wood slotted / steel perforated table top for contaminated air intake
- Magnehelic gauge
- Thermo-bonded polyester cartridge filters
- Dust tight Start/Stop push buttons
- Dust tight starter enclosure
- Dust trays
- Caster wheels
- Forklift lugs

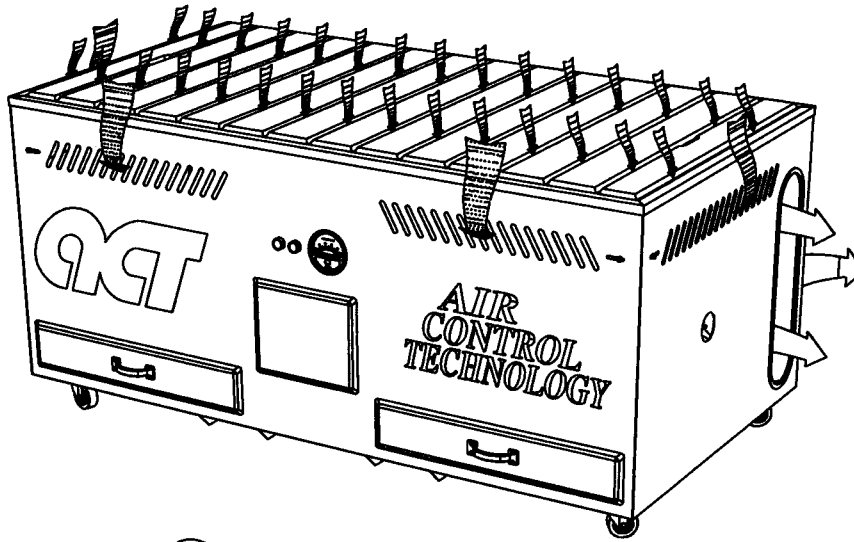

Clean air side/back outlets with adjustable flow direction damper


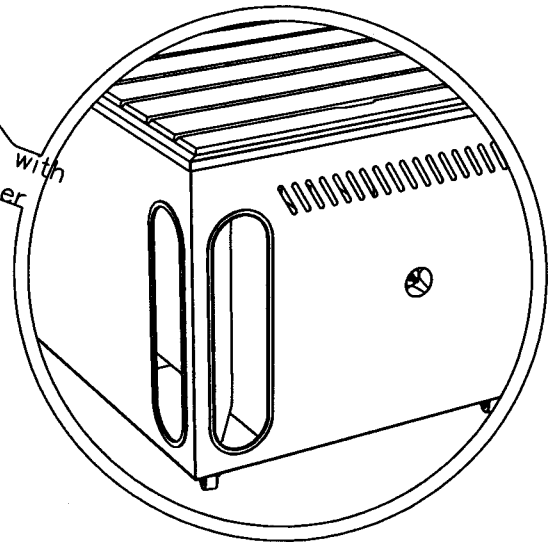


## OPTIONS

- Clean air discharge up
- Adjustable front/side grills for contaminated air intake
- Stainless steel table top
- Hinged table top
- Custom applications & sizes
- H.E.P.A. filters
- Teflon filters

## SPECIFICATION CHART

Flow rate	4,000 C. F. M.
Filter media surface area	350 sq. ft.
Filtration efficiency	99.7% (>1 micron)
Electric motor	5 HP / 575;460/3/60

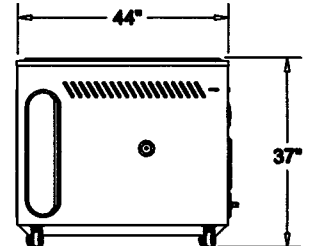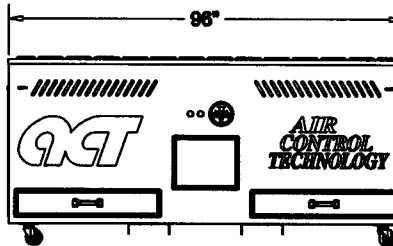

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS CATALOG ARE SUBJECT TO CHANGE WITHOUT NOTICE.

**ACT** AIR CONTROL TECHNOLOGY

3636 Hawkestone Road

Toll Free: (800) 555-1302

Mississauga, Ontario L5C 2V2

Fax: (905) 949-0886

email: [sales@aircontroltech.com](mailto:sales@aircontroltech.com)

[www.aircontroltech.com](http://www.aircontroltech.com)

REL. AUG. 2002

CAT\_2002/00/DC-1SFbr