


THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL DATA OF AIR CONTROL TECHNOLOGY. NO DISCLOSURE, REPRODUCTION OR USE OF ANY PART THEREOF, MAY BE MADE WITHOUT WRITTEN PERMISSION OF THE COMPANY.

DRY SEPARATION PAINT ARRESTOR TYPE SPRAY BOOTH 6W7H7L

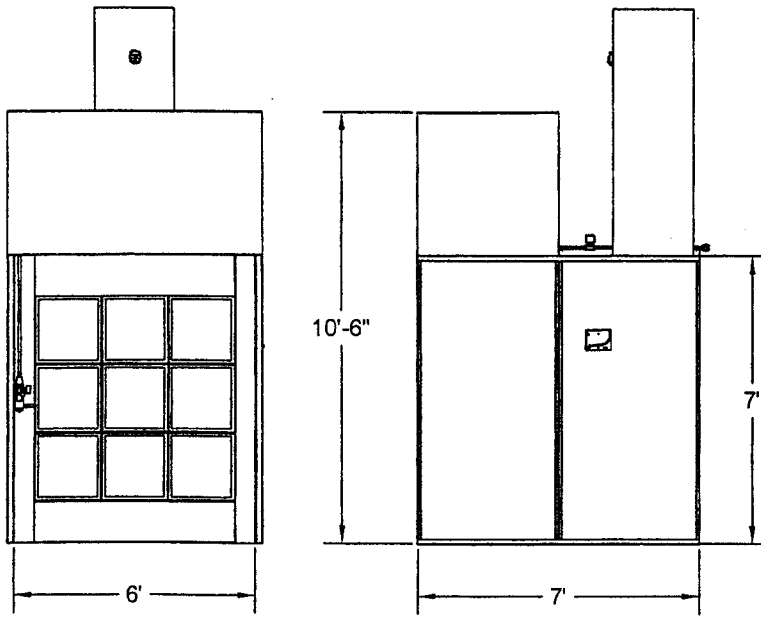


CHARACTERISTICS

FLOW RATE	5250 C.F.M.
FILTER SURFACE AREA	25 sq. ft
FACE VELOCITY	125 F.P.M.
OUTLET VELOCITY	> 2950 F.P.M.
ELECTRIC MOTOR	1.5 HP, 575/460V/3/60 TEFC

NOTES:

1. To maintain proper operation it is recommended that filters pads be replaced when the resistance increases 0.2" water column above the resistance set up by a clean installation.
2. Refer to arrestor pad container for replacement instructions.
3. Proper installation of manometer gauge is essential for correct indication of arrestor pad replacement. Refer to service bulletin.

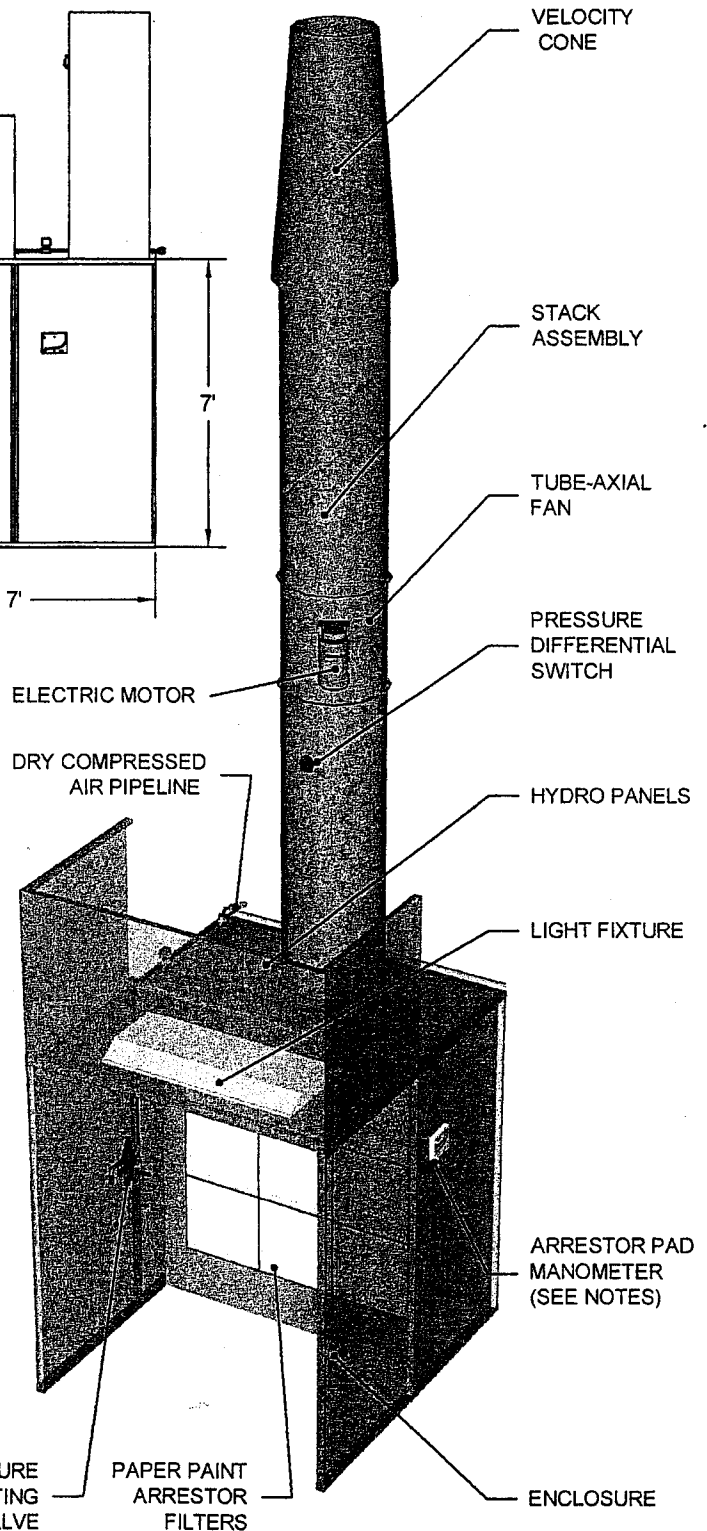

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS CATALOG ARE SUBJECT TO CHANGE WITHOUT NOTICE.



3636 Hawkestone Rd. Mississauga, Ontario L5C 2V2
 Toll Free: (800) 555-1302 Fax: (905)949-0886
 E-Mail: sales@aircontroltech.com
 www.aircontroltech.com

REL. MAY 2002 CAT/CR/677CR01